

QuickScan® Mobile

Cordless Handheld Linear Imaging Bar Code Reader



General Description

Datalogic Scanning's QuickScan Mobile handheld reader is perfect for use at the point-of-sale and this multi-purpose device can also double for inventory, price checking and shelf replenishment activities. The product provides an outstanding return on investment for users seeking a cordless handheld device for general purpose retail and commercial data collection applications.

The QuickScan Mobile reader features Datalogic's cordless STAR-System™, the market's most secure and reliable system for 433/910 MHz narrow band communications. Datalogic's STAR™ radio system is fast, easy to use and guaranteed Wi-Fi interference free. The QuickScan Mobile reader's 12 m / 40 ft radio range capability provides a wide working area eliminating the restraints of cabled devices, making the workplace safer and more efficient.

Solid-state electronics ensure superior reliability and durability versus laser devices and provides for fast and snappy reading performance. Standard multi-interface capability provides host connectivity via USB, RS-232, Keyboard Wedge and Wand emulation. Convenient Plug & Scan kits provide for easy installation and the Scan-While-Charging feature combined with a long lasting user replaceable lithium-Ion battery allows for hands-free reading while simultaneously charging the battery. The Datalogic patented Batch Mode capability allows for the collection of data when out-of-range from the base station.

All of these features combine to provide outstanding bar code reading performance and unmatched reliability. Featuring a 3-year warranty, the QuickScan Mobile reader is the ideal solution for retail and commercial environments where cordless scanning is the key to optimum productivity, lower cost of ownership and a more profitable business.

Features

- > Datalogic STAR Cordless System™ : Superior 12 m / 40 ft radio range for point-to-point connectivity
- > Excellent reading performance provides outstanding first pass read rates
- > Multi-interface: USB, RS-232, Keyboard Wedge and Wand emulation
- > Solid state design provides a reliable product and durability
- > Long lasting Lithium-Ion battery
- > Scan-While-Charging capability
- > Latch mechanism secures reader in cradle providing for stable mobility
- > Batch mode capability
- > GS1 DataBar™ (RSS) decoding capability

Applications

- > POS Check-out
- > In-store Operations
- > Office Automation

QuickScan[®] Mobile

Specifications

ELECTRICAL

READER:

| | |
|--------------------|-------------------------------|
| BATTERY TYPE | 1 Lithium-Ion battery 700 mAh |
| RECHARGE TIME | Max 6 hours |
| OPERATING AUTONOMY | Typical 20,000 reads |

CRADLE:

| | |
|-------------------|--|
| POWER SUPPLY | 5 VDC \pm 5% |
| POWER CONSUMPTION | Max. 4W (charging) |
| LED INDICATORS | Battery Charging: Red Charge Completed: Green Power/Data: Yellow |

MECHANICAL

READER:

| | |
|----------------------------|--|
| WEIGHT (without batteries) | 189 g / 6.06 oz |
| DIMENSIONS | 171 x 90 x 68 mm / 6.72 x 3.54 x 2.80 in |

CRADLE:

| | |
|------------|--|
| WEIGHT | 181 g / 3.68 oz |
| DIMENSIONS | 80 x 130 x 90 mm / 3.15 x 5.11 x 3.54 in |

ENVIRONMENT


| | |
|------------------|--|
| OPERATING TEMP. | 0 ° to 40 °C / 32° to 104° F |
| STORAGE TEMP. | -20 ° to 70 °C / -4° to 158° F |
| HUMIDITY | 0 to 90% non-condensing |
| DROP RESISTANCE | Withstands drops from 1.5 m / 4.9 ft to a concrete surface |
| PROTECTION CLASS | IP30 |

PERFORMANCE

| | |
|--------------------------------------|--|
| SENSOR | CCD Solid State (2088 pixels) |
| LIGHT SOURCE | LED array |
| WAVELENGTH | 630 - 670 nm |
| LED SAFETY CLASS | Class 1 EN 60825-1 |
| MAX. RESOLUTION | 0.10 mm / 4 mils |
| PCS MINIMUM | 20% |
| BAR CODES READ | 2/5 Family, EAN/UPC, Code 128/EAN 128, Code 93, Codabar, TELEPLEN, PLESSEY, Code 49, Code MSI, Code Delta IBM, Code 11, Code 16K, ISBN/ISSN, ISBT 128, Code 39 (plus Code 32, Cij 39), GS1DataBar™ (RSS) |
| MAX SCAN RATE | 235 scans/sec |
| READING INDICATORS | LED, beeper |
| RADIO | |
| RADIO FREQUENCY | 433.92 MHz / 910 MHz |
| BIT RATE | 19,200 baud (433.92 MHz) 36,800 baud (910 MHz) |
| EFFECTIVE RADIATED POWER | < 10 Mw (433.92 MHz) < 1 Mw (910 MHz) |
| RANGE (in open air) | Up to 12 m / 40 ft |
| Restriction of Hazardous Substances: | Complies to EU RoHS |

Reading Diagram

Reading diagram at 25 °C and 300 lux ambient lighting
Reading Zones (10° skew angle)

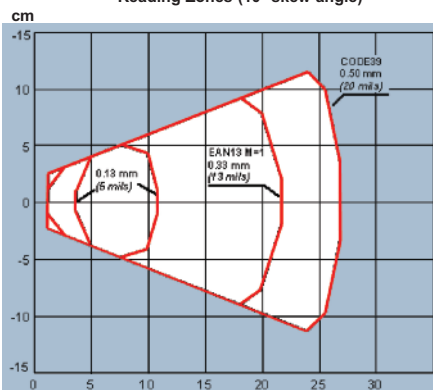

Standard reading area (10° skew angle)



QuickScan Mobile Reader and Cradle

Service Logic Limited

Datalogic House
Dunstable Road
Redbourn
Herts, AL3 7PR

TEL: 0044 (0) 845 260 2277
FAX: 0044 (0) 845 260 2207
Email: info@servicelogic.co.uk
WWW: www.servicelogic.co.uk